

MAXIMUM SECURITY

Replace the lock,
not your whole door.
Genius.

PAS3621:2011

British Standard Kitemark
approved lock for PVCu,
composite & timber doors



Doormaster™

Why Specify PAS3621?

Fitting PAS 3621 multipoint locks will maintain PAS 24 accreditation on existing doorsets providing there are no alterations made to the doorset. It will also improve the level of lock security.

Without a British Standard, the performance of multipoint locks can vary according to the manufacturer.

This means that when you replace an existing multi-point lock, you could be downgrading your security level or invalidating any existing PAS24 doorset accreditation.

PAS3621 addresses this issue as locks that comply offer a suitable replacement lock for PAS24 doors, and also allows you to upgrade the security of any existing door fitted with an MPL.

- Recommended in NHBC and RISC Authority guidelines
- Designed with the replacement market in mind
- PAS 3621 aims to provide a bench mark for selecting appropriate products with the correct level of security.
- As with BS 3621 locks, PAS 3621 locks are tested to equivalent side load forces and test methods
- PAS3621 locks should be used in conjunction with a TS007 3★ cylinder and handle solution to achieve the maximum level of security

Designed for Professionals

Yale Doormaster™ PAS3621 makes replacing multipoint locks simple, and will replace any lock with top and bottom hooks or bolts, a 35m or 45mm backset, and a 16mm or 20mm faceplate.

Latest PAS3621 centre gearbox

Stronger centre gearbox with new hook arrangement and hardened anti-drill plates

Flexible 'crop & mate' design

Enables you to simply cut the lock to length and position gearboxes to match locks being replaced.

Fixing tabs

Make fitting easy and more secure.

PAS3621 Keep

Larger, stronger keeps with more fixing positions (will still fit all profiles)

Hook Bolts

High Security anti-separation and hardened and new centre hook plate anti-drill hook.

1-piece Rollers

Easy to adjust to create a weather-tight seal. (Allen key included.)

16mm or 20mm faceplate options

Suitable for PVCu composite and timber doors.

35mm or 45mm backset options

Available in 35mm or 45mm backset options for maximum flexibility.

3 piece keep & Uni-packer™ System

All versions include a 3 piece keep, and for PVCu doors our patented Uni-packer™ system preassembled for fast, easy, and reliable installation.

New Zinc cover plate with curved profile leading edges.

Latch Easily Reversible

Makes this lock suitable for left or right-handed doors.

NEW Central Hook Bolt

Provides protection against attack, preventing separation.

Secured by Design PAS 24 capable

Doormaster™ PAS3621 has been tested to Police Approved Secured By Design standard and is PAS 24 door set capable.



Guaranteed peace of mind

Yale Doormaster™ PAS3621 is backed by the reputation of Yale, the world's favourite lock since 1843 – and comes with a full 10 year guarantee.



PAS3621:2011

This lock carries the British Standard Kitemark and offers a suitable retrofit replacement product for PAS24 doors without downgrading the security level.

Find out more about Yale Doormaster™ by visiting our website.
yale.co.uk/doormaster

Yale Doormaster™

Will Yale Doormaster™ PAS3621 fit?

Yale Doormaster™ PAS3621 has been designed to fit most PVCu, timber and composite doors with top and bottom hooks or deadbolts:

1. Measure the Backset

Measure the distance **A** between the centre of the cylinder and the metal faceplate of the lock (not the edge of the door).

Yale Doormaster™ PAS3621 replacement locks come in 35mm and 45mm backsets – so if your existing lock is either of those backsets just choose the same size lock.

2. Measure the Centres

Measure the distance between the centre of the cylinder and the centre of the door handle.

B must be 92mm for Yale Doormaster™ PAS3621 to fit the door.

Please note: If the handles inside and outside the door are at different heights, measure the centres on both. If either are 92mm you will be able to fit this lock, but will require new handles – see Yale Replacement PVCu Door Handles.


3. Measure the Reach

Measure the distance between the handle spindle and the top and bottom hook/bolts. To fit the door this must be:

- C** MIN 385mm and MAX 820mm and
- D** MIN 408mm and MAX 845mm

4. Measure the Faceplate

Measure the metal faceplate on the existing lock – this must be 16mm or 20mm for Yale Doormaster™ PAS3621 to fit the door.

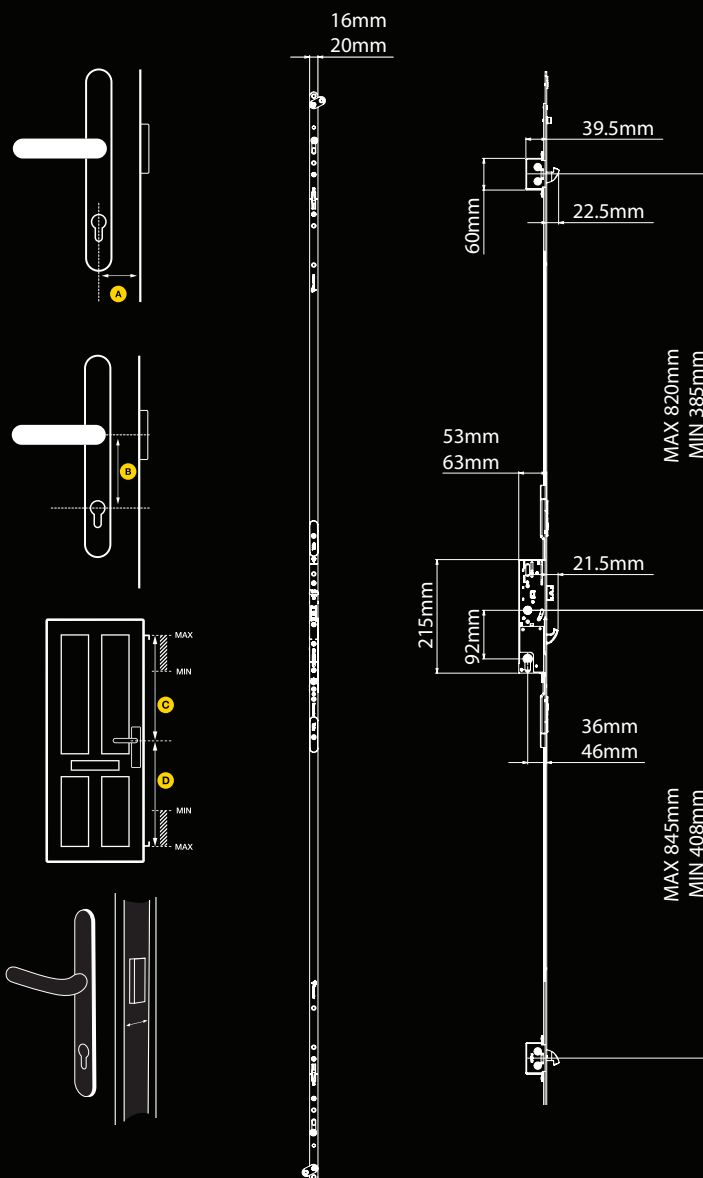

Doormaster™ PAS3621:2011
© 2015 ASSA ABLOY Ltd



Find out more about Yale Doormaster™ by visiting our website.
yale.co.uk/doormaster