



Controls

- 1 Motion sensor
- 2 Alarm speaker
- 3 IR remote receiver
- 4 Battery low LED
- 5 Additional siren socket
- 6 Battery compartment
- 7 4.5V AC adaptor socket (AC adaptor not included)

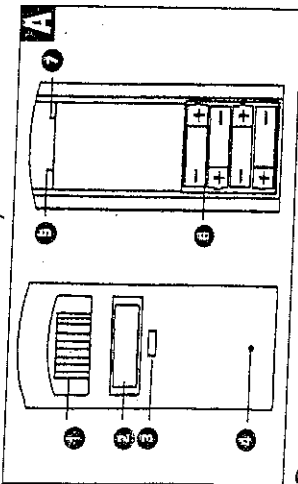


- 8 Arm button
- 9 LED
- 10 Disarm button
- 11 Battery compartment
- 12 Programmable switch
- 13 Battery cover




Battery installation

Alarm unit

- 1 The battery compartment is accessed from the rear of the alarm unit by removing the screw from the base and lifting the back cover as shown **A**.
- 2 Insert four (4) 'AA' size batteries (not included) following the polarity shown **B**.




- 3 When the last battery is inserted the alarm will beep very loudly to indicate that the batteries are installed properly.



- 4 Replace the back cover and fix with screw. The Battery Low LED will light when the batteries need replacing.

Remote control

The remote control uses 3 LR44 batteries (included). If the red light on the remote control does not come on when either the 'ARM' or 'DISARM' buttons are pressed, then the batteries need to be replaced. Diagram **E** shows where the batteries are located. Simply remove and replace with fresh batteries.



on to the back cover and secured using the screw at the base.

Please note that this alarm can also be used free standing.

Operation

When exiting from the protected area

Point the remote control at the alarm unit and press the 'ARM' button. A confirmation tone will indicate that the alarm is armed and you have 30 seconds in which to vacate the area. After this time, if motion is detected then the alarm will sound.

When entering the protected area

Simply point the remote control at the alarm unit and press the 'DISARM' button. Please note that on entering the area, there is a short beep to indicate that motion has been detected and a 4 second delay before the alarm will sound to allow it to be disarmed.

Detection range

The motion detector of the alarm unit has a 6m (20ft) with approximate angles of 30° vertical and 60° horizontal.

Additional siren socket

This socket can be used to connect the SAA5030 Additional Siren to the alarm (not included).

Care and maintenance

To clean the case, simply use a soft slightly damp cloth with water and wipe dry immediately.
CAUTION: Never use chemicals to clean the case, as they may cause damage to the plastic and cause the alarm not to function.

Troubleshooting

The unit does not sound when the batteries are installed
Ensure that the batteries are connected correctly according to the diagram in the battery compartment

The alarm does not arm
Ensure that the back plate of the alarm unit is secure to hold the batteries in place and that the red light comes on when the 'ARM' or 'DISARM' buttons are pressed

The red light on the base of the alarm is on
This is the 'Battery Low Indicator'. The batteries need replacing

The red light on the remote control does not light up when the buttons are pressed
Remove the battery cover of the remote control and replace the batteries

Battery precautions

When using this product follow these precautions at all times.

- Use only the appropriate size batteries
- Be sure to follow the correct polarity when installing the batteries as indicated in the battery compartment. Incorrect polarity may cause damage to the alarm.
- Do not mix different types of battery such as Alkaline and Carbon-zinc or old batteries with new.
- If the alarm is not used for long periods of time, remove the batteries to prevent damage or injury from possible battery leakage.
- Do not recharge batteries not intended to be recharged as they can overheat and rupture. (Always follow the manufacturer's directions.)

Yale
The Meadows, Cannock Road
Wolverhampton, WV10 0FR
Telephone +44 (0) 1902 366911
www.yale.co.uk
Email info@yale.co.uk

Due to our policy of continuous product development, Yale reserves the right to alter the product at anytime without notice.
Yale® is a registered trademark. © 2004 Security Products UK Ltd. All rights reserved.

An ASSA ABLOY Group brand

SAA5020 IFU Rev 2 11/04

ASSA ABLOY